


SINGLE GIRDER EOT CRANE

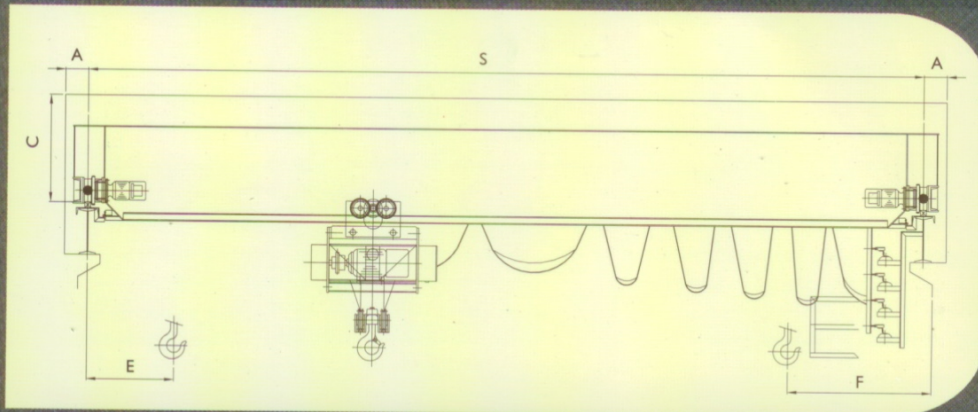

TECHNICAL SPECIFICATIONS

S.W.L (M.T.)	Span (mtrs.)	Head Room (mm)	Wheel Base (mm)	Hook Approach (mm) E/F	End Clearance (mm) A	Wheel Load Per Wheel (Approx)	Weight of Crane Kgs (Approx)
1.0	8	650	1600	700	200	1000	1700
	12	750	2400	700	200	1200	2500
	16	800	3200	700	200	1400	3250
	20	850	4000	700	200	1775	4700
2.0	8	750	1600	750	200	1600	2000
	12	800	2400	750	200	1850	2900
	16	850	3200	750	200	2000	3800
	20	900	4000	750	200	2400	5200
3.0	8	800	1600	850	200	2200	2500
	12	850	2400	850	200	2450	3500
	16	900	3200	850	200	2650	4300
	20	1100	4000	850	200	3125	6200
5.0	8	800	1600	950	250	3400	2900
	12	900	2400	950	250	3725	4200
	16	1000	3200	950	250	4000	5300
	20	1100	4000	950	250	4450	7100
7.5	8	850	1600	1000	250	4850	3600
	12	1000	2400	1000	250	5200	5100
	16	1100	3200	1000	250	5650	6700
	20	1200	4000	1000	250	6100	8500
10.0	8	900	1600	1100	250	6350	4400
	12	1000	2400	1100	250	6750	6000
	16	1200	3200	1100	250	7200	7800
	20	1300	4000	1100	250	7500	9300
15.0	8	1000	1600	1200	250	9500	6200
	12	1100	2400	1200	250	9850	7600
	16	1250	3200	1200	250	10300	9600
	20	1400	4000	1200	250	10800	12000

- NOTE:
1. Above specifications are for Class II Medium Duty Cranes
 2. Above dimensions are for Cranes having 6 Mtr. Lift. There may be minor deviations in dimensions for higher height of Lift.
 3. 'Globe' reserve the right to effect any designs or dimensional charges without Notice